

Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents originally filed in connection with patent application GB0200524.7 filed on 11 January 2002.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, L.C. or PLC.

Registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*AR Bushell*

Dated 26 March 2008

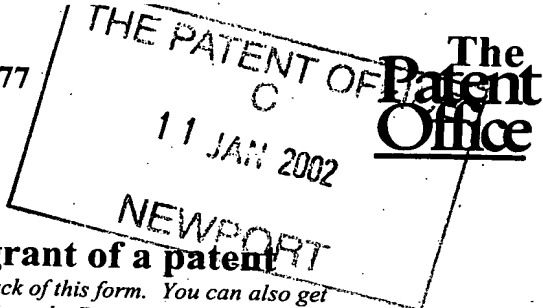

1/77

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

11 JAN 02 E687037-1 D02902  
F01/7700 0.00-0200524.7

0200524.7

8301665001

10777002

1.	Your reference	P2714-GB
2.	Patent application number (The Patent Office will fill in this part)	11 JAN 2002
3.	Full name, address and postcode of the or of each applicant (underline all surnames)	BENDING LIGHT 100D Leicester Road Hinckley Leicestershire LE10 1LU
	Patents ADP number (if you know it)	
	If the applicant is a corporate body, give the country/state of its incorporation	United Kingdom
4.	Title of the invention	IMPROVEMENTS IN AND RELATING TO OPTICAL SYSTEMS
5.	Name of your agent (if you have one)	BRYER, K R
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	K R Bryer & Co 7 Gay Street Bath BA1 2PH
	Patents ADP number (if you know it)	
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country      Priority application number (if you know it)      Date of filing (day / month / year)
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application      Date of filing (day / month / year)
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	Yes

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 14

Claim(s) 4

Abstract

Drawing(s) 5 + 5

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

12. Name and daytime telephone number of person to contact in the United Kingdom Ken R Bryer 10 January 2002

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## IMPROVEMENTS IN AND RELATING TO OPTICAL SYSTEMS

The present invention relates generally to improvements in optical systems, and in particular to optical systems involving openings defined by opaque boundaries and  
5 glazed with one or more glazing elements.

The opaque boundaries of glazed openings or apertures constitute a termination or interruption in the field of view available through the opening. This is widely recognised and accommodated in most circumstances by the ability of the observer  
10 to change position thereby varying the field of view through the opening. There are, however, circumstances where the observer's ability to change his field of view is limited and/or the field-limiting effect of the opaque boundary is of more than usually critical importance.

15 Window apertures often contain frames or glazing bars which act as light barriers to interrupt the field of view available through the aperture. Usually this is of little or no consequence, and the restricted field of view is acceptable; at other times it is possible, as mentioned above, to overcome the obscuration by adjusting the observation position. Furthermore, in unassisted binocular vision, if the barrier is  
20 narrower than the inter-ocular distance (about 60mm) one or other eye can generally receive light from objects which the other eye cannot see because of the obscuration due to the barrier. In some viewing tasks, however, the ability to observe areas obscured by glazing bars or aperture boundaries does become critical. If the barrier is wider than the interocular distance and it is not desirable or possible for the

observer to adjust the observation position in order to mitigate the obscuration created by the barrier the problem is exacerbated.

The present invention seeks to provide means by which the field of view through an opening obscured by opaque boundaries can be enlarged even for a viewer having a fixed observation position.

This is achieved, according to the invention, by providing a glazing element for an opening defined by opaque boundaries, having or incorporating means for diverting light passing through an edge region of the opening whereby to enlarge the field of view through the opening. The said means for diverting light may be a separate element which can be positioned appropriately in relation to the edge region, or may be a specific conformation of the edge region itself. In an opening defined by rectilinear boundaries, the term "edge region" will be understood to refer to an edge defined by one rectilinear boundary, and not the entirety of the boundary of the opening. In other words, in the case of a rectangular or square opening, the "edge region" may be a region along one (or more) side (or sides) of the opening whilst other sides of the opening have no such view-enlarging arrangement.

The present invention finds particular application in the automotive industry where motor vehicle windows are bounded by frame parts of the vehicle which, for reasons of strength and rigidity, have to have a certain minimum thickness. This applies particularly to the so-called A and B pillars, namely the pillars on either side of the windscreen (the A pillars) and the pillars between the front and rear doors (the B

pillars). It is the A pillars which are of particular concern since they define the lateral extent of the driver's field of view forwardly through the windscreen, which is the most critical from a safety point of view. In addition, the A pillars are not vertical, but usually raked at an angle which, in modern vehicles, approaches 45 degrees in order to accommodate the inclination of the windscreen for aerodynamic purposes.

This means that the lateral extent of the obscuration caused by the A pillar is in fact greater than its transverse thickness, and further increased by the fact that the upper part of the A pillar is closer to the observer than the lower part, and therefore subtends a greater horizontal angle at the observer's eye for a given width.

Although the driver of a motor vehicle has a certain freedom to move his head in order to minimise the effect of the barrier constituted by the A pillars, such movement requires a certain amount of time, and also relies on the driver being aware of the presence or possible presence of an object in that part of his field of view obscured by the A pillars. If the driver is unaware of the presence of an object in the obscured part of his field of view the fact that it would have been possible to observe it by movement of the head is irrelevant. Moreover, situations can arise, when two objects are in relative motion, in which the obscuration region moves in synchronism with the obscured object so that the latter remains out of the field of view of the driver for an extended period thereby increasing a potentially hazardous situation.

The principles of the present invention have particular application to the windscreen of a motor vehicle obscured at its lateral peripheral regions by thick A pillars since the presence of light-diverting means in or associated with each lateral edge region

of the vehicle can make it possible for an observer effectively to have a field of view in which the obscuration effect of the A pillars is at least minimised and, in some cases, cancelled altogether.

- 5 By providing a glazing element as defined hereinabove, having means for diverting light passing through an edge region thereof, the observer may view otherwise obscured objects without the need for movement of the head.

10 In a preferred embodiment of the invention the means for diverting light passing through an edge region of the glazing element is integrally formed with the said element. However, the means for diverting light passing through an edge region of the element may be formed separately from the said element, and fixed, attached or otherwise held in position or relative juxtaposition with respect thereto.

- 15 In essence, the present invention provides a glazing element adapted to fit into an opening defined by opaque boundaries and having a central region through which light can pass substantially undeviated and at least one edge region which diverts light through an angle such as to bring its apparent direction, that is the direction of the refracted light, when projected back in a straight line through the refractor, closer to  
20 the central region of the opening, thus in effect, causing the light at the edges of the opening to bend around the glazing element as it passes through the refractor from an object towards the observer. The diversion of light is in practice achieved by refraction, and the angle through which the light is diverted may be greater closer to the edge of the element. In fact, the angle through which the light is diverted

preferably decreases away from the edge of the element smoothly to a point where zero diversion takes place. In other words, the light-diverting means preferably introduces no step-change in light diversion at its edge remote from the boundary. This may be achieved, for example, by making the light-diverting effect vary over the width of the light diverting means. In the case of a refractor this can be achieved by varying the inclination of the surfaces of the refractor such that they are substantially parallel to the surfaces of the central region of the glazing element at a point inward from the boundary, and increase progressively as they approach the boundary. This creates what may be considered as a negative lens, and in the case of a motor vehicle windscreen, the negative lens may be substantially cylindrical. Because the boundary of the windscreen is inclined to the vertical, however, it is preferred that the axis of the cylindrical lens is not parallel to the boundary itself, but inclined at an angle such as to result in the major plane of magnification (albeit negative magnification, it being a negative lens) of the image by the cylindrical lens being closer to the horizontal, preferably being horizontal.

In a preferred embodiment of the invention the glazing element comprises at least two layers of optically transparent material joined face-to-face over substantially the whole area thereof, the edge region of each of the said two layers being formed such that the two layers diverge from one another towards the periphery of the said element with an optical medium of appropriate refractive index between them whereby to form a negative cylindrical lens over the said edge region. This has the advantage that there is no surface discontinuity between the region of the glazing element over which no light diversion takes place and the region of the element at which light is diverted.

The diverging peripheral regions of the glazing element layers may be held apart by a thickened layer of transparent adhesive or by wedge-shape insert located between them. As will be appreciated, for a given divergence angle of the two layers, the refractive index of the material between the layers will determine the precise angle  
5 through which light is diverted as it is transmitted therethrough.

Alternatively, a refractor, which may be a Fresnel refractor, may be attached, secured or held in a fixed relative positional relationship with respect to an edge region of the element. Of course, the light diverting means may be located not only at one edge  
10 region of the element, for example the edge region of a windscreen adjacent the driver or passenger-side A pillar, but also at other edge regions including the upper edge region where it may assist in viewing traffic lights when positioned close thereto. A windscreen formed with such a light-diverting upper edge region may have this region shaded or coloured in order to make it clear to the driver that the light arriving  
15 through this region has been diverted thereby making it easier to observe through the uncoloured non-diverting part of the windscreen.

The present invention also comprehends an optical element for extending the field of view through an edge region of an opening defined by opaque boundaries, comprising  
20 a refractor adapted to fit against a glazing element of the opening in the said edge region thereof and to divert light passing therethrough towards the observer through an angle such as to bring it closer to the normal to the plane of the glazing element. In another aspect the present invention provides a motor vehicle windscreen having an optical element as defined above.

Various embodiments of the present invention will now be more particularly described, by way of example, with reference to the accompanying drawings, in which:

5        Figure 1 is a partial internal perspective view of the interior of a motor vehicle;

      Figure 2 is a cross-section through the line A-A of Figure 1 useful in explaining the principles of the present invention;

      Figure 3 is a cross section similar to that of Figure 2, illustrating the presence  
10    of a light-diverting optical element;

      Figure 4 is a cross-section illustrating the form of one embodiment of light-diverting optical element;

      Figure 5 is a partial cross-section illustrating a glazing element formed as an embodiment of the present invention;

15        Figure 6 is a cross-section illustrating an alternative form of optical element suitable for use with a glazing element; and

      Figure 7 is a schematic axial section illustrating the light deflection and useful for explaining various characteristics of the invention.

20    Referring first to Figure 1 a front portion of a motor vehicle passenger compartment is illustrated, showing the driver's side of a windscreen opening 12 of an LHD vehicle, defined by an A pillar 13 which forms a boundary between the windscreen 12 and a front quarter light or side window 14 of a door 15. As will be appreciated, the windscreen 12 is raked through an angle approaching 45 degrees, and the A pillar

13 has a significant thickness D which, from the driver's position, can constitute a significant barrier, particularly in view of the fact that it, too, is strongly raked so that its effective width, parallel to the line A-A, is greater than its transverse width as represented by D. As can be seen in Figure 2 an observer cannot see anything within the obscuration zone Z defined between two ray paths 16, 17 respectively leading from the observer's left eye L past the left edge of the pillar 13 and the observer's right eye R passing the right edge of the pillar 13.

Although the drawing is foreshortened for the purpose of illustration, it will be seen that an elongate object, such as a cyclist occupying a volume such as that represented by the shaded area V lies entirely within the obscuration zone Z and, therefore, cannot be observed by the observer without displacement of the eyes by moving the head from side to side to vary the position of the obscuration zone Z. Although this may occur if the observer is alert to the possibility of an object in the obscuration zone, this may not happen if the observer has no reason to suppose that the obscuration zone requires monitoring, and this could result in a dangerous situation, particularly if the vehicle is following a curved path and/or the object in the shaded region V is following a path such that the relative movement between itself and the vehicle lies along the obscuration zone Z.

20

If, however, according to the invention an optical element is placed at an edge region of the windscreen 12 and acts to divert the light passing through the windscreen 12 towards the normal to the windscreen 12, and thus towards the observer's eyes L, R as shown by the ray 18, the obscuration zone Z will be reduced by the wedge--shape

area between the rays 17, 18 resulting, in this example, in a part of the vehicle V being visible to the observer without any movement of the head being required. Although the entirety of the vehicle V is not in sight, it is sufficient that a part of it be visible for the observer to be alerted to its presence. If the A pillar 13 has a thickness of, for example, 100mm the observer using unaided binocular vision will require the diverted light to be turned through no more than about 4 degrees in order to reduce the obscuration region to a minimum, that is where the obscuration region is defined between two parallel rays 16, 18 and is, therefore, no greater than the width of the barrier 13 even at a distance. In the absence of such light diversion the obscuration region Z increases in width with increasing distance from the barrier and is, therefore, capable of obscuring larger objects at a greater distance. With this small diversion, therefore, the obscuring effect of the A pillar 13 is, consequently, effectively negated.

Of course, it is not sufficient simply to cause light diversion at the point A as illustrated in Figure 2, but rather to divert light incident on the windscreen 12 over a more extensive region adjacent the edge of the windscreen 12 in contact with the A pillar 13 (herein referred to as "an edge region") and Figure 3 illustrates some of the consideration arising from this. As can be seen in Figure 3, in which the same reference numerals have been used to identify the same or corresponding components, light diversion is achieved by means of an additional component 20 fitted on the inside of the windscreen 12 in the edge region thereof. The precise nature of the light-diverting optical component 20 will be described in more detail below, it being sufficient at this stage to establish that it causes light transmitted there through to be diverted from its incident angle. If the light-diverting effect were

constant across the width of the element 20 as shown by the two rays 18 and 19 this would create its own obscuration zone in view of the fact that the first light ray 21 passing undeviated through the windscreen 12 that is not passing through the light-diverting element 20, and reaching the eye R of the observer would effectively create  
5 an obscuration region between the rays 19 and 21 thereby effectively negating the benefit of having reduced the obscuration effect of the A pillar 13. For this reason it is preferred that the light-diverting properties of the optical element 20 vary across their width, as shown by rays 22, 23, 24 which illustrate progressively less deflection for rays further from the A pillar 13 until, at the very edge of the element 20 the ray  
10 24 passes through effectively undeviated so that an object observed by the observer's right eye does not have a step-change as the eye passes across the boundary element 20. Figures 4 and 5 illustrate ways in which this effect can be achieved.

Referring now to Figure 4 a light-diverting optical element in the form of a cylindrical  
15 negative lens is shown in section. The lens 25 as illustrated has a flat face 26, a concavely curved major surface 27, and an end face 28. In practice, of course, the substantially flat face 26 may be slightly convexly curved to accommodate the curvature of a windscreen as illustrated in Figure 3. The length of the cylindrical lens 25 does not have to be as great as the length of the A pillar 13 since the significant  
20 region as far as potential visible objects are concerned, occupies only a central part of the length of the A pillar 13. For example the lens may be only about 200mm long although, of course, it may be the same length as the A pillar if desired. At most the element 25 may be about 3mm thick (this being the width of the end face 28 and the maximum divergence angle between the face 26 and the face 27 may be in the region

of six degrees. The face 27 is an aspherical curvature with a shorter radius near the end 28 and a longer radius at the opposite or thinner end 29 which may be in the region of 1mm. An element of this form may be fitted, as shown in Figure 5, on the rear face 30 of the windscreen 12 closely adjacent the A pillar 13, with a layer of transparent adhesive 31 securing it in position. As will be appreciated from an observation of Figure 5, the face 26 of the element is convexly curved to match the curvature of the windscreen 12. The element 25 may be a simple moulding, manufactured using an optical thermoplastic and, if not as long as the A pillar 13, may be positioned at about vision height such that the significant part of the observer's field of view lies through the element 25.

As an alternative (not illustrated) the face 27 of the element 25 may be formed in segments (Fresnel) form to provide the same optical characteristics as the lens illustrated in Figure 5. In this case it is possible, and may be preferable, to arrange that the optical axis of the lens is not parallel to the principle physical axis of the device which is parallel to the A pillar 13. Indeed, this arrangement is also possible with a non-segmented lens, as illustrated in Figure 5, but the manufacture of such a lens is more difficult. The advantage of this configuration is that the image of a horizontal line in the object field (such as the horizon itself) is maintained horizontal even upon divergence by the optical element so that the horizon is not bent upwardly by the optical element as would be the case if the axis of the cylindrical surface 27 is parallel to the A pillar 13. In a Fresnel lens this is achieved simply by orienting the grooves which form the segments in such a way that they are not parallel to the principal physical axis of the device; in this case they would be inclined at an angle

when the device is fitted to an A pillar the grooves or ribs appear substantially vertical to the observer.

Referring now to Figure 6 this illustrates a modified laminated windscreen  
5 incorporating an edge region having properties of the lens described in relation to  
Figure 4. In this drawing the windscreen 12 comprises a laminated structure having  
a front panel 33, a rear panel 34 and an intervening laminating adhesive 35. In the  
main region of the windscreen 12 the front and rear panels 33, 34 are parallel to one  
another and the adhesive 35 is of constant thickness. In the edge region E, however,  
10 the rear panel 34 is curved so as to diverge from the front panel 33. The divergence  
edge region 34 B may be held spaced from the edge region 33 E of the front panel 33  
by a thicker layer of laminating adhesive, or by an interposed wedge-section insert  
(not illustrated). As discussed above, the angle of divergence needs to be no more  
than about 6 degrees at the greatest, that is at the very edge of the element, reducing  
15 to zero where the edge region E meets the main central portion M of the windscreen.

This is a particularly elegant solution from the vehicle manufacturer's point of view  
as it involves no extra parts nor any change to the vehicle assembly procedure.  
Furthermore, with only small modification being required to the windscreen tooling  
and manufacturing process, and with possibly no extra part being required, the cost  
20 of incorporating the device into a windscreen is expected to be very small. In effect,  
this implementation consists of no more than a slight swelling of the laminating  
adhesive layer thickness towards the lateral edges of the windscreen. This, of course,  
has to be done under very controlled conditions in order to achieve the right curvature  
of the rear panel 34 in the edge region 34E.

It will be appreciated that, as least as far as its application to motor vehicle  
windcreens is concerned, even a small degree of light diversion at the edges of the  
windscreen is better than none at all in that it reduces the hazard caused by thick A  
5 pillars. In fact, the optimum solution for windcreens may not be complete  
elimination of the object field obscuration zone because of the accommodation  
difficulties between eye and brain which may be caused when different images are  
presented to the brain by the two eyes. However, experience in the use of the now-  
commonly adopted aspheric driver side exterior rear view mirror fitted to motor cars  
10 suggests that, although familiarisation time may be required, this may result in a  
valuable improvement in safety. Partial reduction in the obscuration zone achieved  
according to the invention has particular attractiveness for motor vehicle  
manufacturers since a small increase in the thickness of the laminating adhesive  
towards edges will provide at least a degree of light-diversion without it being  
15 necessary to make any modifications to the way in which the windscreen is fitted to  
the vehicle, and with no modifications to the vehicle at all.

It is also important to note that an edge region along the substantially horizontal edges  
of a windscreen may be provided with a light-diverting properties either integrally as  
20 in the embodiment of Figure 6 or by the addition of an optical element as in the  
embodiment of Figures 4 and 5. This may provide, in the case of the upper edge of  
a windscreen, an extended upward view to assist in the visibility of traffic lights  
which are sometime obscured by the roofline of a vehicle, especially when it is  
stationary close to the traffic light. An extended view through a lower region of a

windscreen may improve the view of the front part of the vehicle for manoeuvring or parking, and this would also be of benefit in the rear window of hatchbacks, estate cars and the like.

- 5 For any embodiment of the invention used in motor vehicles it will be noted that the light diversion, as shown in Figure 7, results in the possibility that, with both eyes looking through the windscreen at a distant object, the one nearer the A pillar may be viewing the object through the light-diverting device, whilst the other eye is viewing the same object through an undiverted light path. Consequently a convergence angle  
10 of the eyes is necessary in contrast to the "parallel" eye configuration which would be needed if the device were not present. Convergence of the eyes is not normal when viewing distant objects although, of course, does occur when viewing close objects. It is, therefore, a physical condition to which the eyes are accustomed and requires only familiarisation to achieve comfortable observation. By providing an  
15 aperture with light-diverting means according to the invention this effectively increases the size of the aperture by an amount equal to the angle that the light is deflected. This applies to both binocular and monocular observation.

## CLAIMS

1. A glazing element for an opening defined by opaque boundaries, having or incorporating means for diverting light passing through an edge region of the opening  
5 whereby to enlarge the field of view through the opening.
2. A glazing element as claimed in Claim 1, in which the means for diverting light passing through the edge region of the element is a refractor.
- 10 3. A glazing element as claimed in Claim 1 or Claim 2, in which the means for diverting light passing through an edge region of the element is integrally formed with the said element.
4. A glazing element as claimed in Claim 1 to 2, in which the means for diverting  
15 light passing through an edge region of the element is formed separately from the said element and fixed, attached or otherwise held in physical juxtaposition with respect thereto.
5. A glazing element as claimed in any preceding Claim, adapted to fit into the  
20 said opening and having a central region through which light can pass substantially undeviated and an edge region which refracts light through an angle as it passes therethrough, the angle being greater closer to the edge of the element.
6. A glazing element as claimed in Claim 5, comprising at least two layers of

optically transparent material joined face-to-face over substantially the whole area thereof, an edge region of each of the said two layers being formed such that the two layers diverge from one another towards the periphery of the said element whereby to form a negative cylindrical lens over the said edge region.

5

7. A glazing element as claimed in any preceding Claim, in which the means for diverting light is so formed that there is no substantial surface discontinuity between the region of the element over which no light diversion takes place and the region of the element at which light is diverted.

10

8. A glazing element as claimed in Claim 6, in which a wedge shape insert is located between the said two layers at an edge region thereof.

15

9. A glazing element as claimed in any preceding Claim, in which a Fresnel refractor is attached, secured or held in a relative positional relationship with respect to an edge region thereof.

20

10. A glazing element as claimed in any preceding Claim, in which the said means for diverting light passing through an edge region of the element is located at two opposite edge regions of the element.

11. A glazing element as claimed in any preceding Claim, in which the said means for diverting light passing through an edge region of the element comprises a negative cylindrical lens.

12. A glazing element as claimed in any preceding Claim formed as a motor vehicle windscreen.
- 5 13. As optical element for fitting to or locating in association with a glazing element such as a motor vehicle windscreen, as claimed in any preceding claim.
14. A glazing element substantially as hereinbefore described with reference to, and as shown in, the accompanying drawings.
- 10 15. An optical element for extending the field of view through an edge region of an opening defined by opaque boundaries, comprising a refractor adapted to fit against a glazing element of the opening in the said edge region thereof and to divert light passing therethrough towards the observer through an angle such as to bring its
- 15 apparent direction towards a central region of the glazing element.
16. An optical element as claimed in Claim 15, in the form of a negative aspheric lens.
- 20 17. An optical element as claimed in Claim 15 or Claim 16, in the form of a Fresnel lens.
18. An optical element substantially as hereinbefore described with reference to, and as shown in, the accompanying drawings.

19. A motor vehicle windscreen having an optical element as claimed in any of Claims 15 to 18 affixed or otherwise held or secured in position thereon.
- 5 20. A motor vehicle windscreen as claimed in Claim 19, in which the optical element is a generally cylindrical negative lens oriented such that its direction of greatest (negative) magnification is generally horizontal.

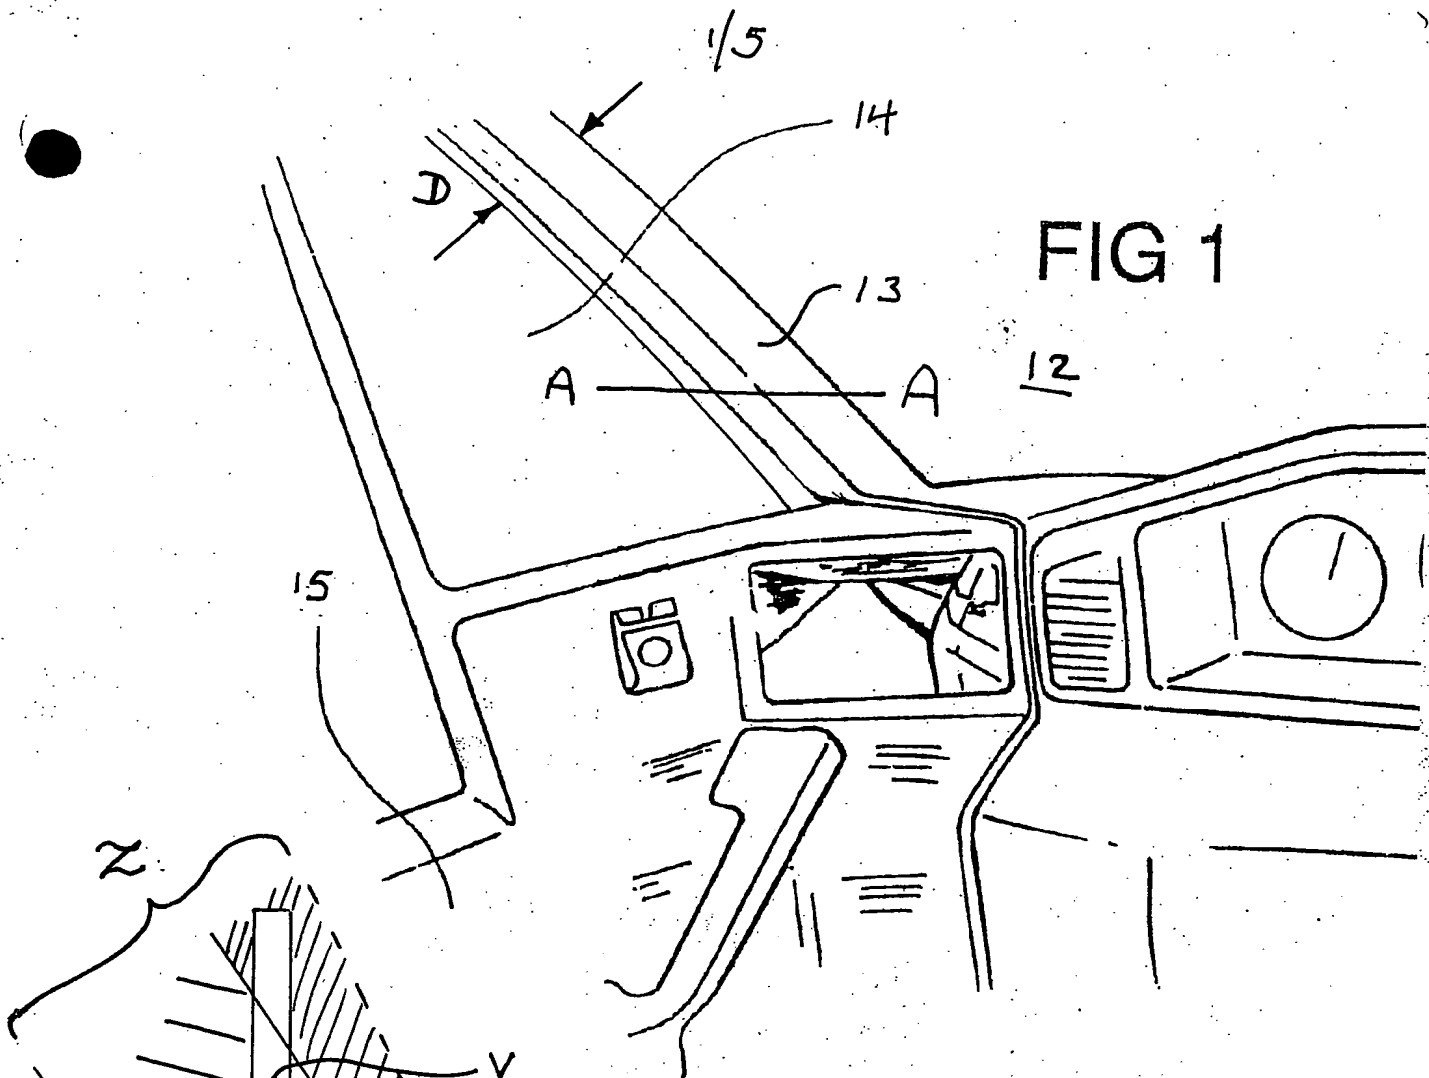


FIG 1

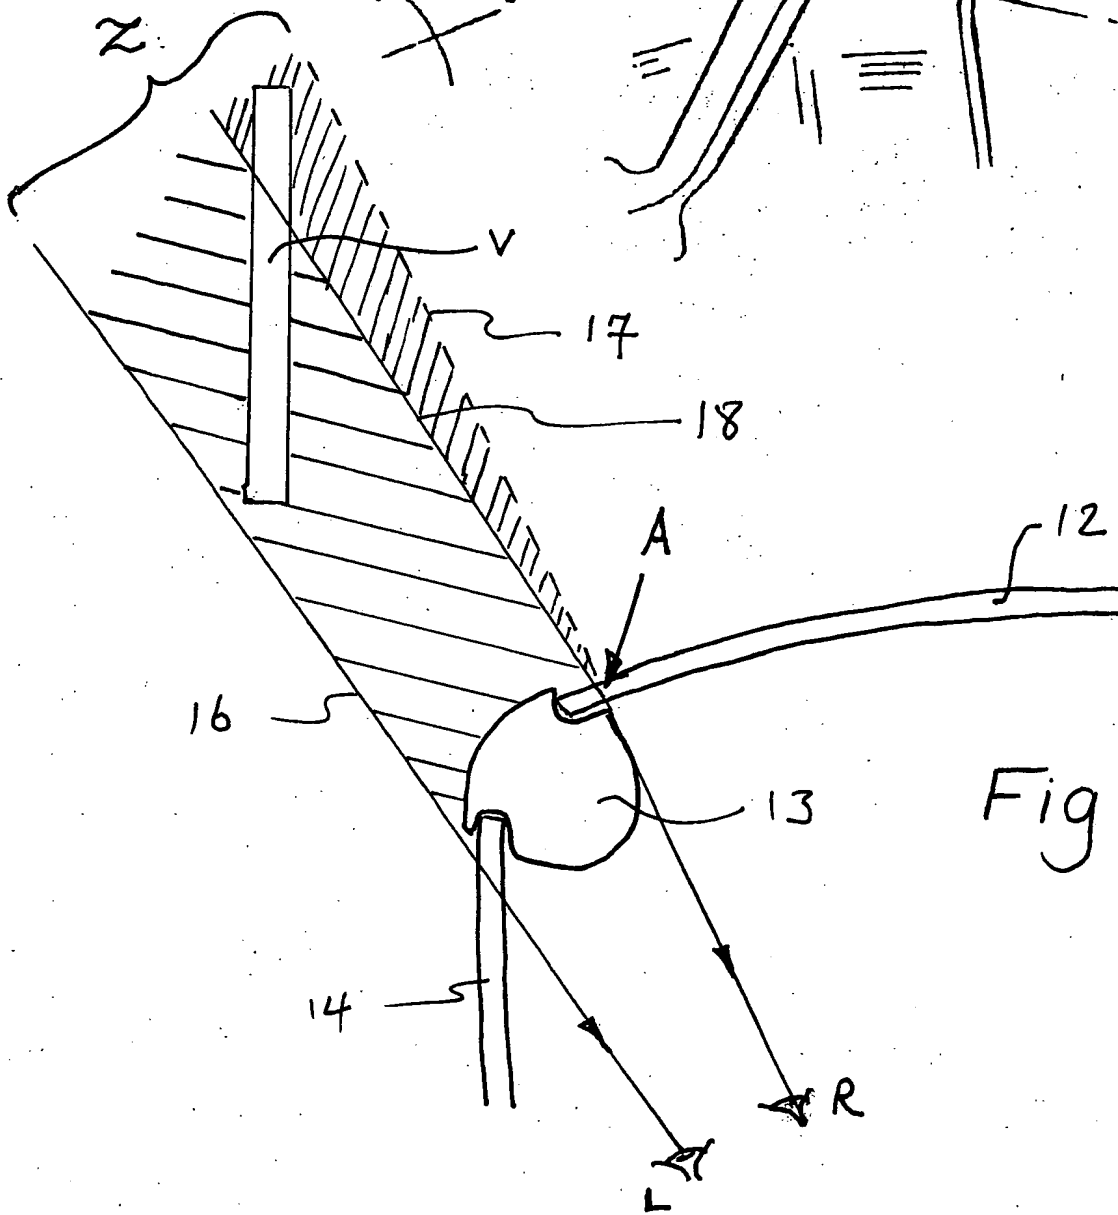


Fig 2

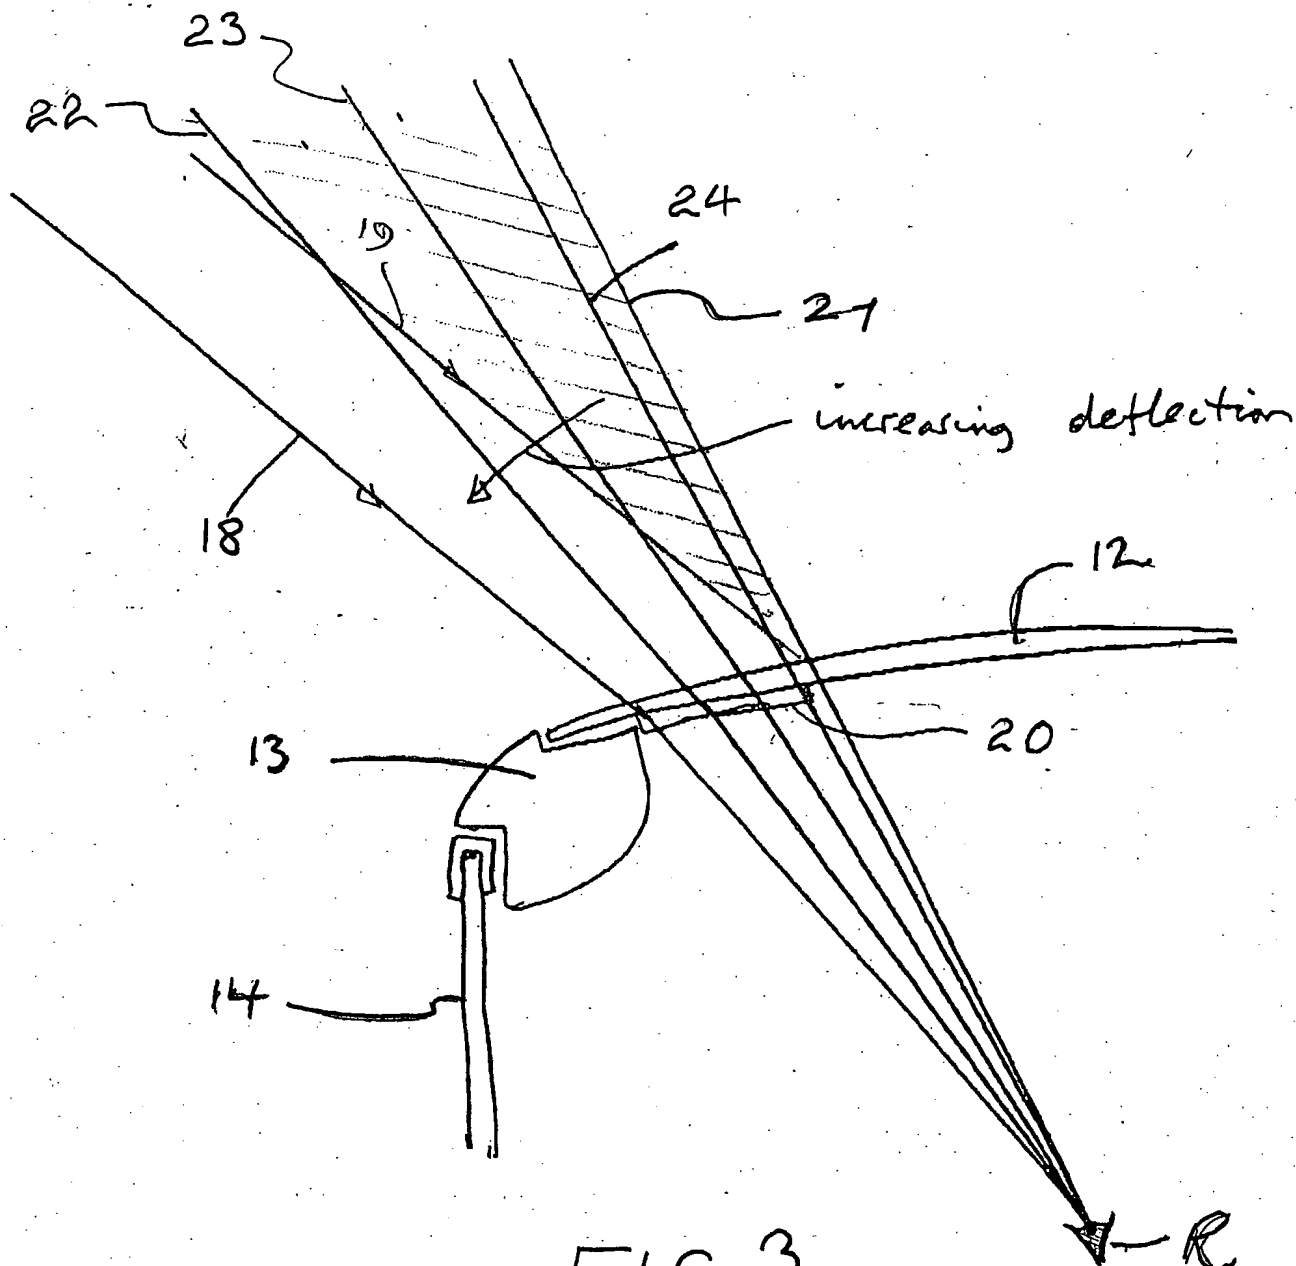


FIG 3

3/5

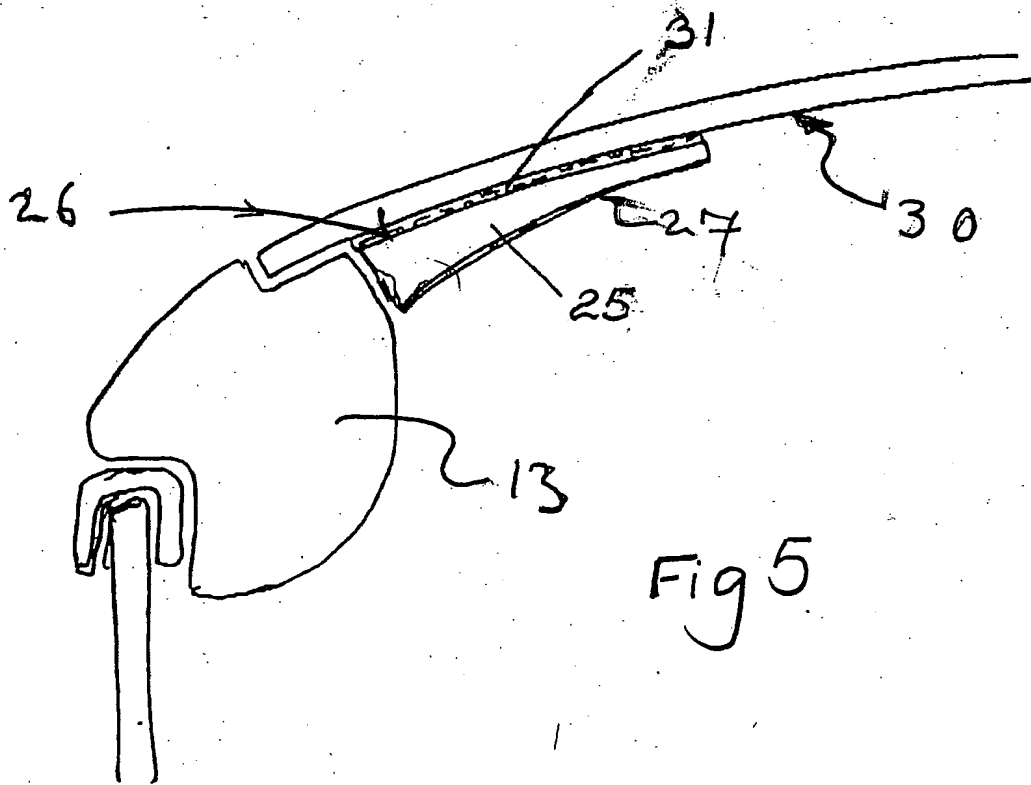
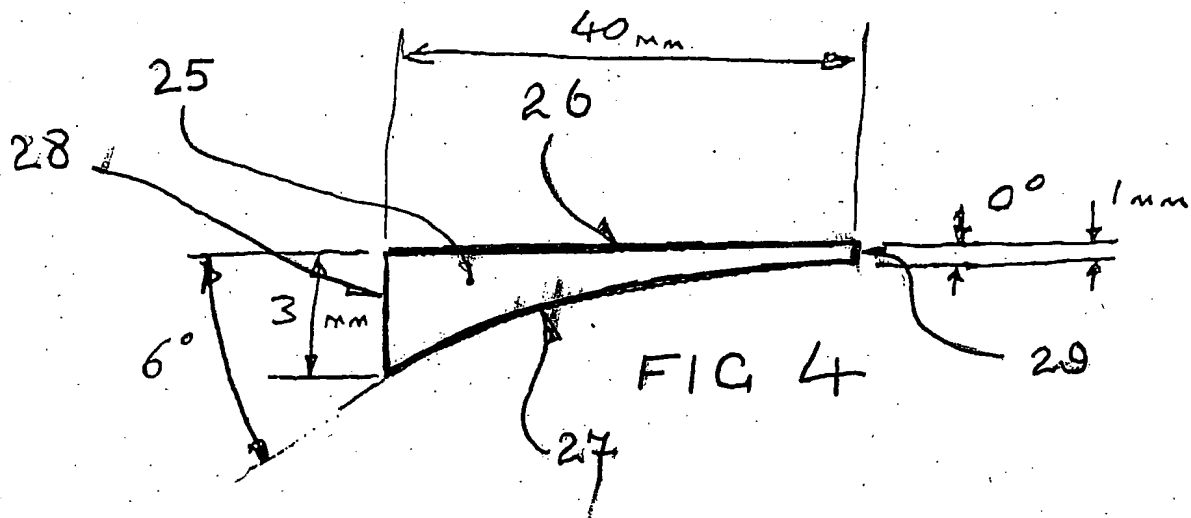
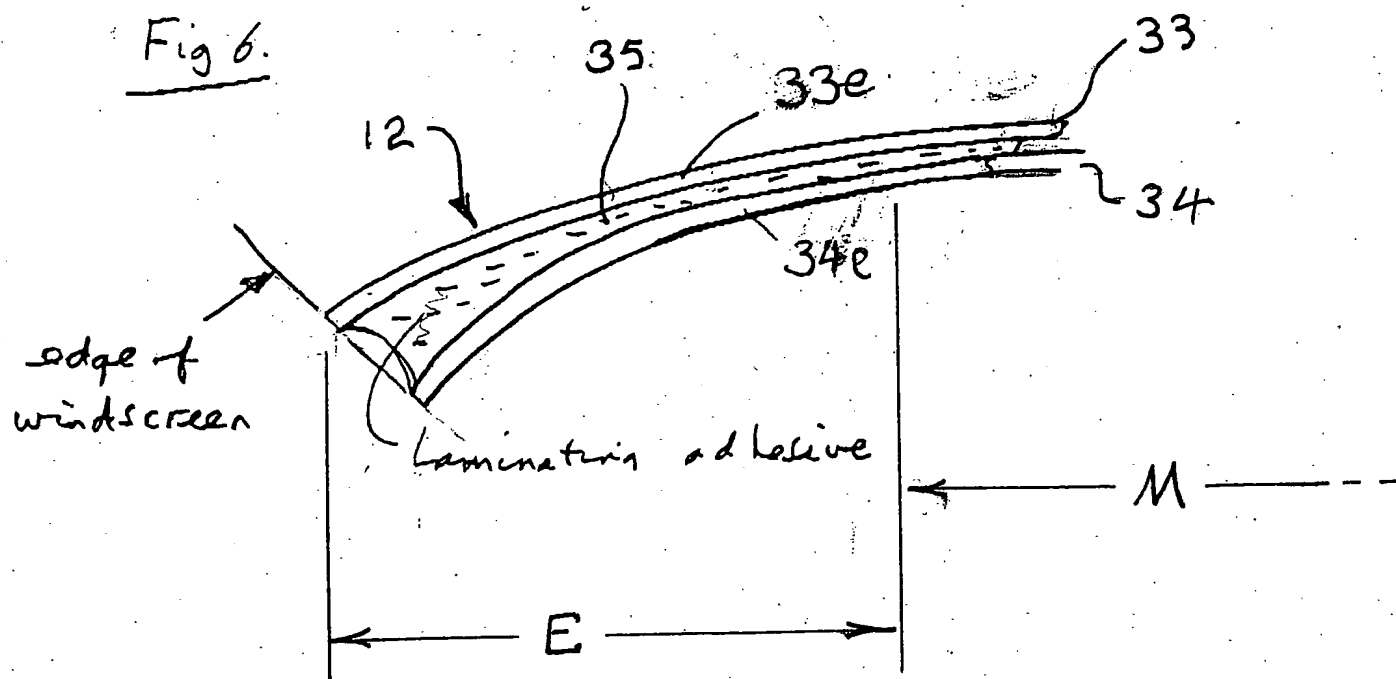


Fig 6.

5/5

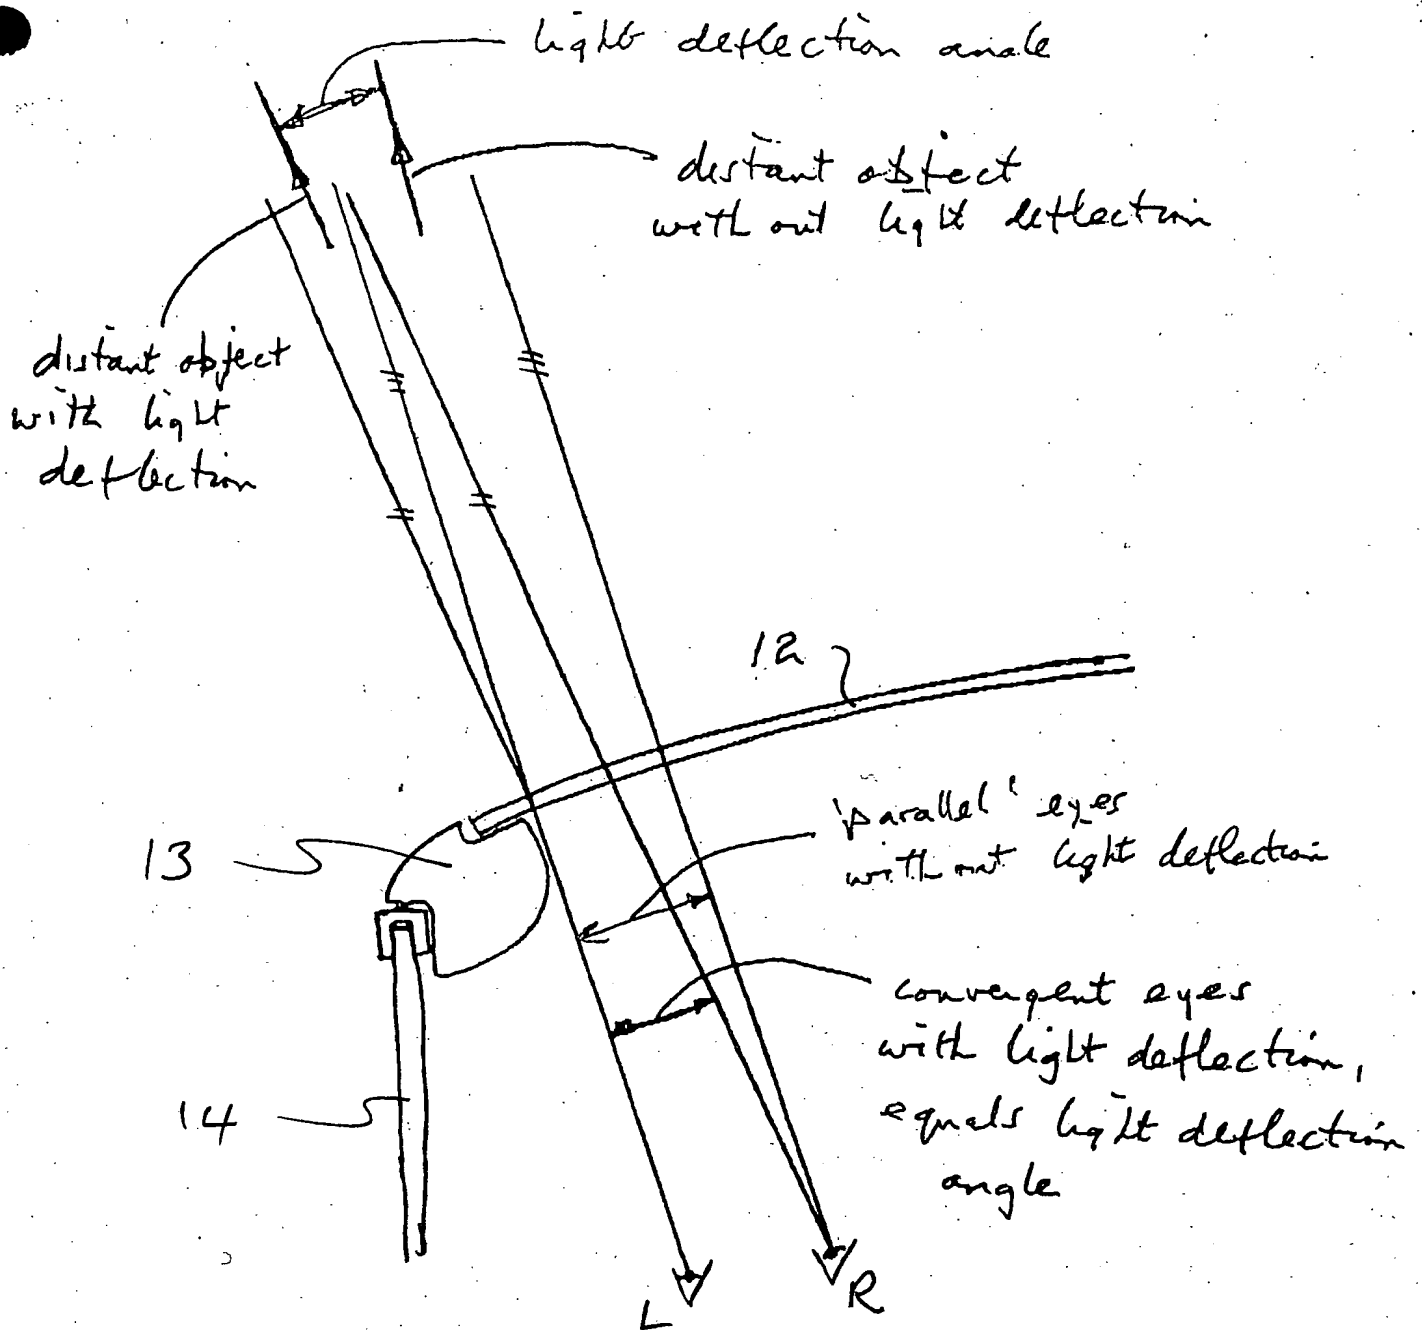


Fig 7